

SHANDONG TAIRAN IMPORT AND EXPORT CO.,LTD

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China
 Email:wp@cnjingganrefractory.com/sdwenping@163.com
 Contact:Rose Tel/Wechat:+86-13275332819
 Tel:86-533-4188518 Fax:86-533-4188518


Lubricant Series



1,Product performance parameters

Item	TR-2360	TR-2317
lipa	5±0.5	6±0.5
Free alkali	1.5±0.5	0.5±0.5
Usage method	dipping	dipping
Service temperature ℃	70-80	70-80
Time min	3-10	3-10
Features	Reactivity, for processing general plastic materials	Reactivity, for forging

2,Classification of Lubricant series

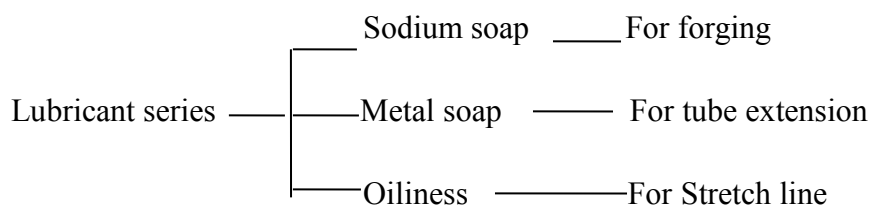

3,Brief introduction: industrial lubricants include lubricating oil and grease, which have many kinds and are widely used. Lubricants are also commonly used in plastic

SHANDONG TAIRAN IMPORT AND EXPORT CO.,LTD

processing, to improve the fluidity and demoulding, to prevent adhesion in the machine or mold and produce fish eye and other defects. The main function of lubricant is to reduce friction and wear. The amount of lubricant is generally 0.5-1%

4. The lubricants produced by our company's factory are used for machinery and plastic processing, with complete types and remarkable lubrication effect, meeting the needs of users

5,Good feedback of product use effect,the products have been exported to South Korea, Japan,Pakistan

6,We are a professional supplier, who can provide customers with free product technology, use and other issues

Do you want to find a professional supplier of Lubricant Series?

Do you want to find a stable and credible supplier?

Then please contact with us

Contact me:

Email:wp@cnjingganrefractory.com/sdwenping@163.com

TEL: 86-0533-4188518 / **FAX:** 86-0533-4188518

Rose:+86-13275332819(wechat/whatsapp number)